




Thimble ion chambers ,0.04 cm³

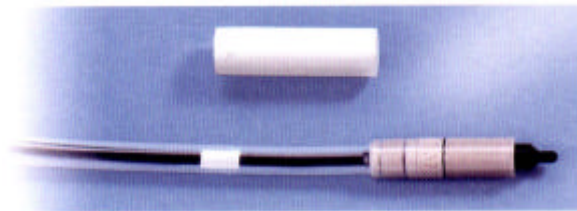

Vented through waterproof sleeve

Fully guarded

Supplied with a ⁶⁰Co factor calibration certificate ($N_{D,w}:N_k:H_{D,a}=N_{gas}$) traceable to PTB

This small-volum air ionization chamber offers high spatial resolution for absolute dose measurements, depth dose measurements and field profile analysis in a water-phantom or free-air. It is waterproof, vented chamber suitable for electron and photon beam dosimetry. Rugged Shonka plastic material provides increased durability.

SPECIFICATIONS:

Material:

Outer electrode: Shonka C552 / 1.76 g/cm³

Inner electrode: Shonka C552 / 1.76 g/cm³

Connector type: BNC triaxial

Cable length: 1.4 cm

Operation:

Typical leakage: $+5 \times 10^{-16}$ A


Dimensions:

Active volume: 0.04 cm³

Total active length: 3.6 mm

Inner diameter of outer electrode: 4 mm

Thickness of outer elektrode: 0.4 mm
Diameter of inner electrode: 1.0 mm

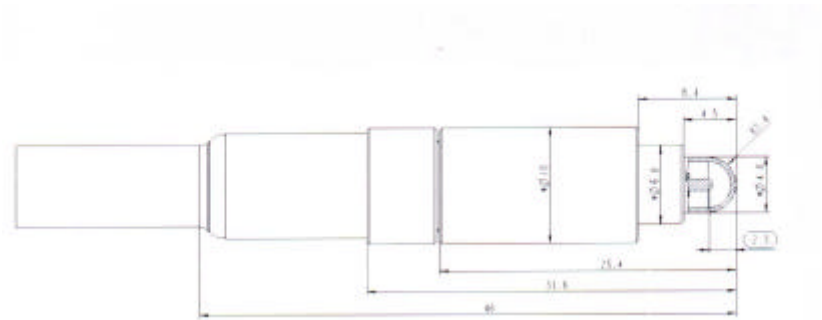

Model: EWCC04

© Elimpex-Medizintechnik, Spechtgasse 32, A-2340 Moedling, Austria
phone +43-2236-410450
fax +43-2236-410459

